

THE PREMIUM QUALITY LINE FROM



Marley

Industrial Products

LEADING EDGE
A Division of Marley Engineered Products



HEAVY DUTY, INDUSTRIAL AND COMMERCIAL
AIR CIRCULATORS



Visit our website at: www.marlymep.com

AUTOMOTIVE AIR CIRCULATOR

Non-Oscillating



AF30H fan head shown with optional 2430PB-Y pole and base.



- Safety yellow motor, guards, and mounts
- Hinged guards swing open for easy cleaning
- Factory assembled motor - blade - guard assembly to ease final assembly
- 6' drop cord extension available

MOTOR	2-speed 1/3 HP 1Ø 115 volt totally enclosed permanently lubricated permanent split capacitor ball bearing motor
SWITCH	2-speed, Drop-Cord switch
CORD	3 conductor SJT type
BLADE	coated steel
GUARD	3-1/2" oversized double locking, Yellow Powder coat
FAN HEAD TILT	pedestal - 10° down or 28° up wall mount - 40° down or 0° up
COLUMN ADJUSTMENT	48-7/8 to 66 inches locking collar
PEDESTAL BASE	27" diameter steel dome
COLUMN/BASE CONNECTION	5 carriage bolts

Meets OSHA standards / 5 year limited warranty.

MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall, I-beam, ceiling, or adapter mount.

Fan Performance

BLADE SIZE	FAN HEAD	MAX AMPS	CFM	
			HIGH	LOW
30"	AF30H	2.9	10,800	7,700

NOTE: AF30H fan head assembly does not meet UPS shipping criteria.

EXTRA HEAVY-DUTY AIR CIRCULATOR THE FACTORY FAN®



Non-Oscillating

A powerful 1/2 HP circulator. This fan is engineered and designed for use in large, non-air conditioned facilities, which require general air circulation. This fan is ideally suited for providing spot cooling where long aisles and production lines exist.



LCHXN30 fan head shown with optional 2430PB pole and base.



- Fan head (motor-blade-guard) ships in one UPS-able box
- Optional mounts ship in separate UPS-able box

MOTOR	1/2 HP, 2-speed, 120 volt, totally enclosed, thermally protected, PSC motor with permanently lubricated ball bearings
SWITCH	Heavy duty pull chain
CORD	3 conductor SJT type
BLADE	coated steel
GUARD	vinyl coated
FAN HEAD TILT	pedestal - 10° down or 28° up wall mount - 40° down or 0° up
COLUMN ADJUSTMENT	48-7/8 to 74-5/8 inches
PEDESTAL BASE	27" diameter steel dome
COLUMN/BASE CONNECTION	5 carriage bolts

Meets OSHA standards / UL Listed / 5 year limited warranty.

MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall, I-beam, ceiling, or suspension mount.

Fan Performance

BLADE SIZE	FAN HEAD	MAX AMPS	CFM	
			HIGH	LOW
24"	LCHXN24	8.1	7300	5500
30"	LCHXN30	8.1	9200	6900

MACH 30® High Performance Air Circulator

Non-Oscillating



Mach 30® fan head shown with optional 2430PB pole and base.



- High performance grade fan
- Fan head (motor-blade-guard) ships in one UPS-able box
- Optional mounts ship in separate UPS-able box

MOTOR	2-speed 1/3 HP totally enclosed permanently lubricated permanent split capacitor ball bearing motor
SWITCH	pull chain
CORD	3 conductor SJT type
BLADE	coated steel
GUARD	double locking chrome plated
FAN HEAD TILT	pedestal - 10° down or 28° up wall mount - 40° down or 0° up
COLUMN ADJUSTMENT	48-7/8 to 74-5/8 inches
PEDESTAL BASE	27" steel dome
COLUMN/BASE CONNECTION	5 carriage bolts

Meets OSHA standards / UL Listed / 3 year limited warranty / CUL approved
MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall, I-beam, ceiling, or suspension mount.

Fan Performance

BLADE SIZE	FAN HEAD	MAX AMPS	CFM	
			HIGH	LOW
30"	MACH 30	2.8	8900	6900

INDUSTRIAL AIR CIRCULATOR

Non-Oscillating



30ACH fan head shown with optional 2430PB pole and base.



Available in two styles:

- Assembled head (motor-blade-guard) in one UPS-able carton optional mount in separate UPS-able carton.
- Unassembled uni-pack all components (motor, blade, guards and mount) in one UPS-able carton.

MOTOR	2-speed 1/4 HP 1Ø 115 volt ball bearing totally enclosed permanently lubricated permanent split capacitor (220V 1Ø motor also available)
SWITCH	pull chain
CORD	3 conductor SJT type
BLADE	coated steel
GUARD	double locking chrome plated
FAN HEAD TILT	pedestal - 10° down or 28° up wall mount - 40° down or 0° up
COLUMN ADJUSTMENT	48-7/8 to 74-5/8 inches
PEDESTAL BASE	27" diameter steel dome
COLUMN/BASE CONNECTION	5 carriage bolts

Meets OSHA standards / UL Listed / 1 year limited warranty.

MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall, I-beam, ceiling, or suspension mount.

Fan Performance

BLADE SIZE	FAN HEAD	MAX AMPS	CFM	
			HIGH	LOW
24"	24ACH	2.2	7000	5900
30"	30ACH	2.5	8200	6200

HEAVY DUTY OSCILLATING AIR CIRCULATOR †



ONE OF AMERICA'S MOST POPULAR OSCILLATING MECHANISMS †

Thousands in use as a general circulation fan. This fan is ideal for providing general cooling in occupied open areas, such as staging areas, courtrooms, classrooms, and auditoriums.



LCHHD300 shown with optional LAPC26B pole and base.



MOTOR	1/4 HP, 3-speed, 120 volt, totally enclosed, thermally protected, PSC motor with permanently lubricated ball bearings.
SWITCH	Heavy duty pull chain
CORD	3 conductor SJT type
BLADE	Coated steel
GUARD	vinyl coated
FAN HEAD TILT	15° up or down - Pedestal Mount 15° up or down - Wall Mount
COLUMN ADJUSTMENT	48-7/8 to 74-5/8 inches
PEDESTAL BASE	26" diameter steel dome
COLUMN/BASE CONNECTION	5 carriage bolts

Meets OSHA standards / UL Listed / 2 year limited warranty.

MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall, I-beam, ceiling mount.

Fan Performance

BLADE SIZE	FAN HEAD	MAX AMPS	CFM		
			HIGH	MED	LOW
24"	LCHHD24O	3.1	6000	5100	4500
30"	LCHHD30O	3.3	7600	5900	5000



Features a durable American-Made safety clutch style oscillating mechanism. The fan may be set to operate at 45° or 90° or in a fixed position. The air circulator is available as a 24" or 30" Pedestal or Wall mounted fan. NOTE: Oscillating fan not to be used in upside down positions.

INDUSTRIAL OSCILLATING AIR CIRCULATOR



30ACHO shown with optional 2430PB pole and base.



- Oscillates in 90° arc or can be locked in fixed position

Available in two styles:

- Assembled head (motor-blade-guard) in one UPS-able carton optional mount in separate UPS-able carton.
- Unassembled uni-pack all components (motor, blade, guards and mount) in one UPS-able carton.
- Not to be used with:
 - I-Beam Mount
 - Ceiling Mount
 - Suspension Mount

MOTOR	2-speed 1/4 HP 1Ø 115 volt ball bearing totally enclosed permanently lubricated permanent split capacitor
SWITCH	pull chain
CORD	3 conductor SJT type
BLADE	30" unit - 3 Blade - Coated Steel 24" unit - 3 Blade - Coated Steel
GUARDS	double locking chrome plated
FAN HEAD TILT	15° up or down - Pedestal Mount 15° up or down - Wall Mount
COLUMN ADJUSTMENT	48-7/8 to 74-5/8 inches
PEDESTAL BASE	27" diameter steel dome
COLUMN/BASE CONNECTION	5 carriage bolts

Meets OSHA standards / UL Listed / 1 year limited warranty

MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall mount bracket.

Fan Performance

BLADE SIZE	FAN HEAD	MAX AMPS	CFM	
			HIGH	LOW
24"	24ACHO	2.2	7000	5900
30"	30ACHO	2.5	8200	6200

SPECIALTY WASHDOWN CIRCULATORS



This exclusive fan is ideally suited for comfort cooling in food and beverage processing facilities, greenhouses, poultry plants, amusement parks and other high humidity or washdown environments. Fan meets UL 507 spray test requirements.



SIZES	24" and 30"
MOTOR	2-speed, 1/3 HP, 48-frame, single phase, 120 volt totally enclosed, permanently lubricated ball bearings, built-in thermal overload protection, permanent split capacitor motor.
SWITCH	5' long air actuated pendant switch
CORD	3 Conductor SJT type
BLADE	Balanced aluminum
GUARD	Zinc plated

Meets OSHA standards / UL Listed / 2 year limited warranty.

Washdown Air Circulator Mounts

Fan motor and all mounts on this page: Pedestal, Ceiling, I-Beam, Wall, and Suspension, are coated with FDA approved white epoxy (FDA 21 CFR 175.300), USDA approved for incidental food contact.

MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall, I-beam, ceiling mount.

Fan Performance

BLADE SIZE	FAN HEAD	VOLTS	HP	MAX AMPS	CFM	
					HIGH	LOW
24"	LCHWD24	120	1/3	4.0	6800	5200
30"	LCHWD30	120	1/3	4.1	8600	6200

SPECIALTY 277 VOLT AIR CIRCULATOR



- Engineered for quick and economical wiring installation in any facility with 480 volt, 3 phase, 4 wire WYE connected electrical service.
- For factory wall/ceiling or I-beam applications.
- Save on wiring and installation costs. Uses existing 277 volt lighting circuitry. Operates on low AMP draw.



MOTOR	2-speed 1/4 HP ball bearing permanently lubricated capacitor start
SWITCH	pull chain
CORD	3 conductor SJT type
BLADE	aluminum
GUARDS	double locking chrome plated
COLUMN ADJUSTMENT	5' non-adjustable
PEDESTAL BASE	26" diameter steel dome
COLUMN/BASE CONNECTION	5 carriage bolts

1 year limited warranty / Meets OSHA standards / UL listed motor

MEP recommends the use of safety cable model 2430SC with this fan when mounted on a wall, I-beam, ceiling mount.

Fan Performance

BLADE SIZE	FAN HEAD	MAX AMPS	CFM	
			HI	LO
24"	LCHHD24-7	1.4	6000	4500
30"	LCHHD30-7	1.4	7000	5000



MOUNTS

PEDESTAL MOUNT



I-BEAM MOUNT



CEILING MOUNT



WALL MOUNT



SUSPENSION MOUNT



CATALOG NUMBER	UPC 6-85360	DESCRIPTION	SHIP WT
STANDARD (excludes Washdown & Heavy Duty Oscillating head assemblies)			
2430PB	09898 2	Adjustable Pedestal	35
2430WG	09902 6	Wall Mount	5
2430I	09896 8	I-Beam Mount	8
2430C	09899 9	Ceiling Mount	7
2430S	09899 9	Suspension Mount	3
2430SC	09900 2	Secondary Support Cable	2
PBWK	01347 0	Optional Wheel Kit	3
HEAVY DUTY OSCILLATING			
LAPC26B	-	Pedestal	35
LWBO	-	Wall Mount	
WASHDOWN			
LFPCBWD	-	Adjustable Pedestal	35
LWBWD	-	Wall Mount	5
LIBWD	-	I-Beam Mount	8
LCMWD	-	Ceiling Mount	7

CIRCULATOR REPLACEMENT PARTS

MODEL NO. LCHXN24 & LCHHD240 PART NUMBER DESCRIPTION LPM2050U Motor (LCHXN24) LPM3025-0 Motor (LCHHD240) LCCLIN2422BL Fan Blade (LCHXN24) LCCLIN2417BL Fan Blade (LCHHD240) LIN24GF Guard Front LIN24GR Guard Rear		MODEL NO. LCHXN30 & LCHHD300 PART NUMBER DESCRIPTION LPM2050U Motor (LCHXN30) LPM30250 Motor (LCHHD300) LCCLIN3016BL Fan Blade (LCHXN30) 1210-2015-000 Fan Blade (LCHHD300) LIN30GF Guard Front LIN30GR Guard Rear	
MODEL NO. 24ACH & 24ACHO PART NUMBER DESCRIPTION 1010MPI Motor (24ACH) 1010MPO Motor (24ACHO) B24I Fan Blade 24GB Fan Blade & Guards (2)		MODEL NO. 30ACH & 30ACHO PART NUMBER DESCRIPTION 1010MPI Motor (30ACH) 1010MPO Motor (30ACHO) 30GB Fan Blade & Guards (2) - 30ACH 30GBO Fan Blade & Guards (2) - 30ACHO B30I Fan Blade	
MODEL NO. MACH 30 PART NUMBER DESCRIPTION 517-076 Motor B30I Fan Blade 30GB Fan Blade & Guards (2)		MODEL NO. AF30H PART NUMBER DESCRIPTION 1010MPY Motor 2149 Fan Blade AF30GB Fan Blade & Guards (2)	

COMMERCIAL AIR CIRCULATORS




LDC20

- All metal construction
- Pull chain switch; 3 speed control
- Double Locking Guard
- 6' grounded cord
- Up/Down 15° fan head
- Maximum Height 60" to top of Guard
- Meets OSHA Standards
- Adjustable column
- 1 year warranty

Ordering Summary:

MODEL NUMBER	DESCRIPTION	AMPS	CFM		MOTOR	SHIPPING WEIGHT
			HIGH	LOW		
LDC20	20" Pedestal Fan	2.1	5950	3500	1/6 H/P Drip Proof	32 lbs.

INDUSTRIAL FLOOR CIRCULATORS

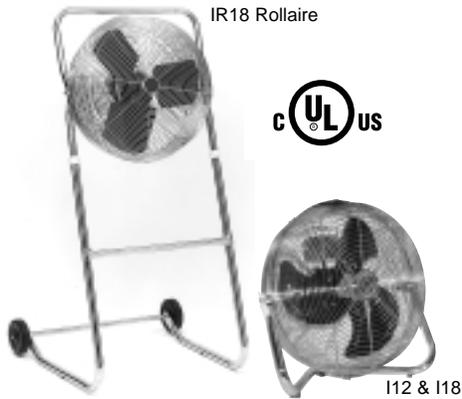

SIZES	12", 18", 20" & 24"
MOTOR	3-speed, 1 HP, 115 volt sleeve bearing open drip proof permanently lubricated.
SWITCH	Rotary
CORD	10' long 3-conductor SJT Type
BLADE	Painted-Steel
GUARD	Double locking, chrome plated
FAN HEAD TILT	360°

Meets OSHA standards / UL Listed / 1 year limited warranty

Ordering Summary:


BLADE SIZE	MODEL NUMBER	CFM			HP	AMPS (HIGH)	SHIPPING WEIGHT
		HIGH	MED	LOW			
12"	I12	2650	2100	1550	1/15	1.2	8 lbs.
	I18						16 lbs.
18"	IR18	5500	4600	3400	1/8	2.6	24 lbs.
	*I18TE						16 lbs.
20"	I20	5950	4650	3500	1/8	2.6	20 lbs.
24"	I24	6500	4800	3500	1/8	2.0	31 lbs.

*I-18TE has a 115V 1Ø totally enclosed motor for dirty environments. 10' Long 3 conductor SJT Type cord. 360° fan head tilt meets OSHA/UL/cUL.

1 year limited warranty.

UTILITY CIRCULATORS

Bolt to



Work Benches . . .
Steel Shelving . .
Machines Ceilings . . .
I-Beams . . .
Walls . . .
Or Any Surface . . .

- Mounts with one bolt or lag screw
- Fan head rotates 360° in both the horizontal and vertical direction to deliver air flow to any spot in room.
- Optional wall mounting bracket.



SIZES	12" & 14"	18" & 20"
MOTOR	1/15 HP S-Pole	1/8 HP PSC
SWITCH	3-speed 1Ø 115 volt sleeve bearing open drip proof permanently lubricated	
CORD SET	pull chain	
BLADE	10' long 3 conductor SJT type	
GUARDS	aluminum	
	double locking chrome plated	

Meets OSHA standards / UL Listed / 1 year limited warranty

Ordering Summary:

BLADE SIZE	MODEL NUMBER	TYPE	CFM			AMPS (HIGH)	SHIPPING WEIGHT
			HIGH	MED	LOW		
12"	B12P	Bolt on circulator	2650	2100	1550	1.2	11 lbs.
14"	B14		3200	2900	1600	1.3	13 lbs.
18"	B18		5500	4600	3400	2.6	19 lbs.
18"	B18TE*		5500	4600	3400	2.6	19 lbs.
20"	B20P		5950	4650	3500	2.6	20 lbs.

*B-18TE has 115V 1Ø totally enclosed motor for dirty environments.

Optional Wall Mount Bracket:

CDMW	1 lb.
------	-------

COMMERCIAL BELT DRIVE DRUM BLOWERS

The MVB series Belt Drive fans share many of the same high quality design features as the IHD series, but are intended for medium duty commercial use. The belt drive design provides a high volume airflow drum fan without excessive noise. The durable 24 gauge steel housing, chrome plated steel guards, and rubber wheels keep the fan light and portable.



- Permanently lubricated ODP Motor
- Durable 24 gauge steel housing
- Chrome plated steel guards
- 8" semi-pneumatic wheels
- 23" wheel base
- Double handle design for easy transporting
- 10' Grounded three conductor cord

Ordering Summary:

BLADE SIZE	MODEL NUMBER	HP	CFM	AMPS	SHIPPING WEIGHT
36"	MVB36B	1/2	12,900	8.0	71 lbs.
42"	MVB42B	1/2	15,800	8.0	100 lbs.

INDUSTRIAL BELT DRIVE PORTABLE BLOWER

The IHD series drum fans were specifically designed for industrial applications where quality, performance, and durability are required. The high performance motor, belt drive system, and specialized fan blade design combine to maximize airflow and velocity while reducing fan noise. Quality features include a 20 gauge steel housing, heavy duty chrome wire guards, sturdy fan and motor supports, large rubber wheels with integrated bearings and a wide stable base.



- High Quality ODP Motor
- Rugged 20 gauge steel housing
- Heavy duty chrome plated steel guards
- Large 10" rubber wheels
- Stable 24" wheel base
- Balanced fan blade
- 10' Grounded three conductor cord

Ordering Summary:

BLADE SIZE	MODEL NUMBER	HP	CFM	AMPS	SHIPPING WEIGHT
36"	IHD36B	1/2	14,800	8.0	111 lbs.
42"	IHD42B	3/4	18,000	10.8	132 lbs.
48"	IHD48B	1	23,000	15.0	153 lbs.

DIRECT DRIVE PORTABLE BLOWER

The MVB series Direct Drive fans are intended for light duty commercial use where an economical solution is needed. Applications where sound levels are less of a priority like garages and agricultural facilities are well suited for direct drive fans.



- Two speed totally enclosed motor
- Durable 24 gauge steel housing
- Chrome plated steel guards
- 8" semi-pneumatic wheels
- 23" wheel base
- Double handle design
- 10' Grounded three conductor cord

Ordering Summary:

BLADE SIZE	MODEL NUMBER	HP	CFM		AMPS	SHIPPING WEIGHT
			HI	LO		
30"	MVB30D	1/3	7400	7400	2.75	55 lbs.
36"	MVB36D	1/2	9200	7200	3.75	66 lbs.

SPECIALTY BLOWERS PEDESTAL DRUM FAN



MPF30WDD




- Rain tight motor
- Sturdy steel housing
- Corrosion resistant-hinge

- 10' grounded cord
- Green / Yellow finish

Ordering Summary:

BLADE SIZE	MODEL NUMBER	DESCRIPTION	HP	CFM		AMPS	SHIP. WT.
				HIGH	LOW		
30"	MPF30WDD	Washdown Motor GFCI Protection Vinyl Coated Grille	1/3	7400	5800	2.75	70 lbs.

WET LOCATION INDUSTRIAL DRUM FAN



MGHD20LDD



- Washdown motor
- Sturdy steel housing

- 10' grounded cord
- Green / Yellow finish

Ordering Summary:

BLADE SIZE	MODEL NUMBER	DESCRIPTION	HP	CFM		AMPS	SHIP. WT.
				HIGH	LOW		
20"	MGHD20LDD	Washdown Motor Corrosion Resistant Housing & Grille - Drum Leg Support	1/6	6100	4500	1.8	32 lbs.

WET LOCATION INDUSTRIAL DRUM FANS



MGHD24DDC



- Rain tight motor
- Sturdy steel housing

- Corrosion resistant-hinge
- 10' grounded cord

- Green / Yellow finish

Ordering Summary:

BLADE SIZE	MODEL NUMBER	DESCRIPTION	HP	CFM		AMPS	SHIP. WT.
				HIGH	LOW		
30"	MGHD30DDC	Washdown Motor Corrosion Resistant Housing & Grille Drum on Wheels	1/3	7400	5800	2.75	48 lbs.
36"	MGHD36DDC	Washdown Motor Corrosion Resistant Housing & Grille Drum on Wheels	1/2	9200	7100	3.75	60 lbs.

OSCILLATING WALL/DESK FAN



- 12" and 16" Units
- Power head adjusts vertically for use on walls with 2 keyhole slots in base plate
- 90° continuous oscillation, or can be locked in place for non-oscillation
- 3-Wire, 6 1/2' grounded cord
- UL listed
- Meets Federal OSHA requirements
- 1 Year Limited Warranty
- Comes complete with metal hanging plate

MODEL NUMBER	TYPE	BLADE SIZE	CFM			AMPS (HIGH)	SHIP. WEIGHT
			HIGH	MED	LOW		
WDF12	Wall/Desk Fan	12"	2100	1550	1350	.4	10 lbs.
WDF16	Wall/Desk Fan	16"	3200	2850	2300	.5	13 lbs.

RETRO STYLED CIRCULATOR



- High Velocity Cooling
- All Steel and Cast Components
- ON/OFF Oscillating Control
- Extra Large Three-speed Motor
- SUPER-HI-LOW Speed Settings
- Scratch-resistant Gloss Finish
- Easy Tilt Adjustments
- Packaged Fully Assembled
- 3 Prong Safety Power Cord

BLADE SIZE	MODEL NUMBER	FINISH	CFM			AMPS (H)	SHIP. WEIGHT
			LOW	MED	HIGH		
12"	RDF12CH RDF12CU	Chrome Copper	1350	1550	2100	0.2	22 lbs.
16"	RDF16CH RDF16CU	Chrome Copper	2300	2850	3200	0.22	32 lbs.

WALL/BENCH MOUNT



- 12" wall or bench mount circulator
- Constructed to U.S. Navy specification Mil-F-68F
- 2 speed, 115V, 1Ø, drip proof motor, 1/15 Hp
- All metal construction
- Wires directly to electrical line
- Fan head adjusts 90° horizontally and vertically
- Fan with Mil-Spec packaging available, consult factory for pricing and availability.

MODEL NUMBER	BLADE SIZE	CFM		SHIP. WEIGHT
		HIGH	LOW	
N12	12"	2200	1500	9 lbs.

PORTABLE BLOWERS POWER CATS®



- The Power Cat® is a unique portable blower that can be used for ventilating, cooling and heating the work space
- Blower rotates 90°
- Duct accessories available
- Can mount to wall or free standing

POWER CAT® A300						
MODEL NUMBER	MOTOR	BLOWER CFM	RECEPTACLE	CORD	LAMP	SHIP WT.
A 300	120 Volts/60Hz	300	Duplex	25' grounded Heavy-Duty	40 watts	12 lbs.

SUPER CAT® 1200XL						
MODEL NUMBER	MOTOR	BLOWER CFM	RECEPTACLE	CORD	LAMP	SHIP WT.
1200XL	120 Volts/60Hz	1120/877	Duplex	25' grounded Heavy-Duty	N/A	44 lbs.



MODEL NUMBER	DESCRIPTION	SHIP WT.
300IA	Intake Accessory	7lbs.
300FE	Fume Exhaust Nozzle	3lbs.
300EXT	Extension Accessory	6lbs.
300DA	Duct Accessory - 10' x 5"	5 lbs
1200EA	Exhaust Adapter	3.5 lbs.
1200IA	Intake Adapter	1.5 lbs.
1200FD	Flexible Duct	11lbs.
1200DC	Duct Coupling	1.5 lbs.
1200FE	Welding Fume Exhaust Nozzle	5 lb

AIR HOG® UTILITY BLOWER



WM8120

- 8" dia. fan
- 1225 CFM of Air Movement
- Industrial Grade Grounded Cord
- Easy to Carry Handle
- Cord Storage Wrap
- On/Off Control Switch

WM12120

- 12" dia. fan
- 2450 CFM of Air Movement
- Industrial Grade Grounded Cord
- Easy to Carry Handle
- Cord Storage Wrap
- On/Off Control Switch

WM12120WL

- 12" dia. fan
- 2450 CFM
- Wet Location Motor
- SJT Wet Location Cord
- Easy to Carry Handle
- Cord Storage Wrap
- On/Off Control Switch
- Green/Yellow Color

WM12120



WM8120



Flexible Duct Accessory

MODEL NUMBER	CFM	AMPS	SHIPPING WEIGHT
WM8120	1225	1.6	20 lbs.
WM12120	2450	5.6	31 lbs.
WM12120WL	2450	5.6	31 lbs.

Flexible Duct Accessory		
MODEL NUMBER	DESCRIPTION	SHIP WT.
WM8FD	15' long 8" Flex Duct Accessory	12 lbs.
WM12FD	15' long 12" Flex Duct Accessory	20 lbs.

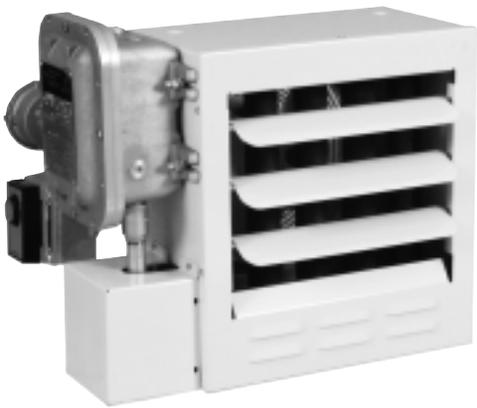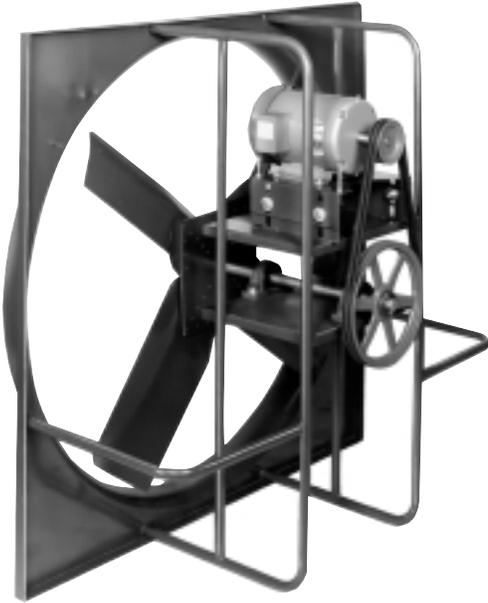

ZBL-MACIB

01-03



Marley
Engineered Products
An **SPX** Company
470 Beauty Spot Rd. East
Bennettsville, SC 29512 USA